

STONE CRUSHER

RSM



from 180 to 360 HP



Ø 20 in max (stones)



D15 in

STONE CRUSHER WITH FIXED TOOTH ROTOR.

The RSM is designed for the toughest applications. With multiple working widths available, it can crush stones up to 20" in diameter.

STANDARD EQUIPMENT
Cam clutch on side PTO
PTO shaft with cam clutch
Gearbox with freewheel
Transmission with side gearbox
Hydraulic rear hood
Adjustable Hardox® counter-blade
Interchangeable steel counter-blades in Hardox®
Interchangeable inner antiwear plates in Hardox®
Anti dust machine body
Inside lateral protection
Protection chains

OPTIONS
PTO shaft
Bolted grid on rear hood
Hydraulic top link
Dozing blade
Hydraulic support roller
Multiple tooth options
Stronger transmission for tractors up to 360HP
Automatic greasing kit



FEATURES





Enclosed machine body
protects internal components



Hydraulically controlled hood
adjusts final product size

Adjustable Hardox® counter-blade
effectively control the final product size

Skids with interchangeable Hardox® skid plates and penetration points
help the machine better penetrate the ground

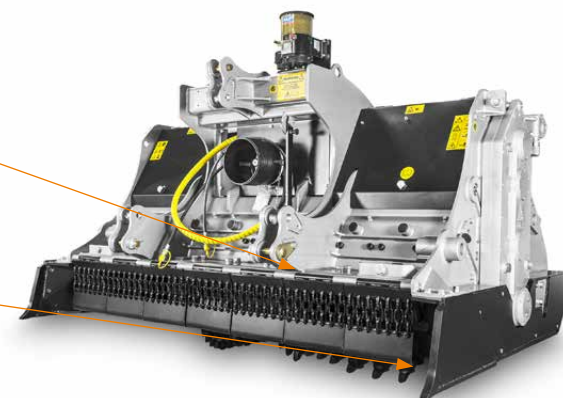

MAIN OPTIONS



1 Automatic greasing kit



2 Hydraulic top link
to achieve and maintain depth

MODEL	Engine (HP)		PTO (rpm)	Working width (in)	Total width (in)	Weight (lbs)	Max shredding diameter (in)	Max working depth (in)	No. teeth type	
	min	max							G/3+STC/3/FP+STC/FP	R+R/HD+STC/3/FP+STC/FP
RSM 175	180	360	1000	72	89	11778	20	15	82+4+4	106+20+4+4
RSM 200	200	360	1000	82	98	12667	20	15	94+4+4	126+20+4+4
RSM 225	220	360	1000	91	108	13556	20	15	106+4+4	144+20+4+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.